




---

---

## DC Series Cabinets

- Available in three widths, four heights and two depths
- All welded 1.5" steel tubing construction provides a 3000 lb. static load rating
- Seismic Zone 4 rated, UL listed
- PCI Compliant cabinet
- 19" wide rack mount
- 7" wide PDU cavity in rear
- Mounting rails (2 pr. included) are cage nut style, punched on EIA 5/8-5/8-1/2" standard spacing and are fully adjustable front to rear. All are provided with M6 Cage Nuts and screws (bag of 50 each)
- Optional flush mounted split (top & bottom) side panels supplied with key lock for optimal security
- Optional doors include flush mount perforated doors, split flush mounted perforated doors, and curved surface mount Perforated doors. All doors include standard EMKA locks
- Optional flush mount top choices include Perforated with cable access, or solid with brushed cable openings
- Open base for raised floor ventilation option
- Bottom corners gusseted with both seismic tie down and caster mount features
- Four point leveling
- Includes top mount frame coupler
- Optional casters available (SWE-ACS)
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

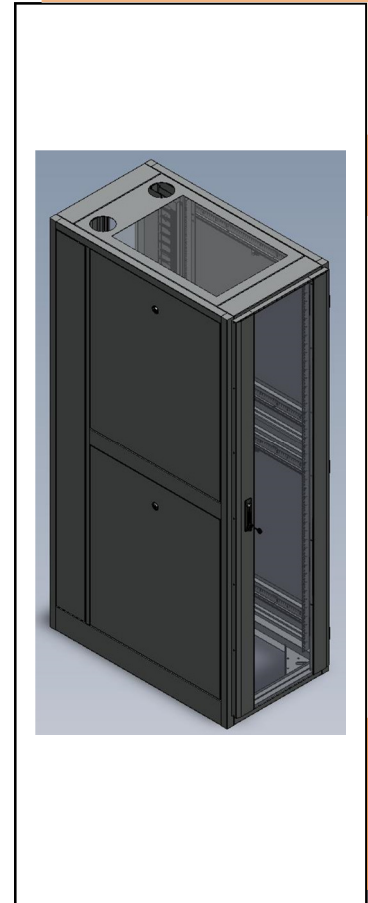




**DC SERIES FRAMES AND MOUNTING RAILS**

**Frames:**

- Available in 4 heights, 3 widths and 2 depths
- All welded 1.5” steel tubing provides a 3000 lb. static load rating
- 7”W PDU cavity in rear
- Includes (2) pair of Cage Nut mounting rails and leveling feet
- Includes top mount frame coupler
- Bottom corner gussets for caster mounts or seismic tie down points
- Frames are Seismic Zone 4 rated, UL Listed
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

**Mounting Rails**

- 12 gauge steel Cage Nut style punched on EIA standard spacing
- RU marks and silk screened numbers

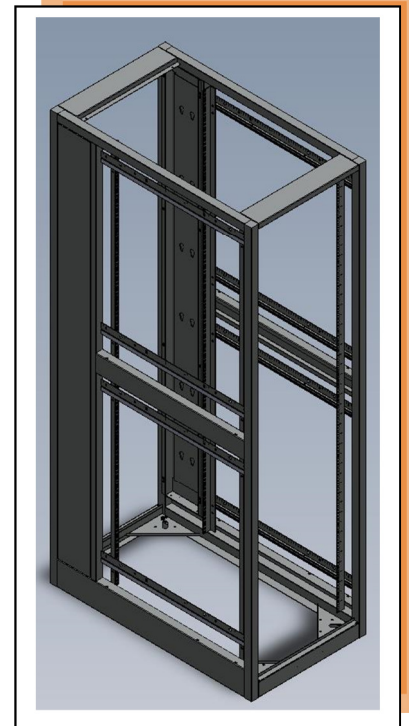

**Frame Part Numbers: HxWxD**

24”W Frame	28”W Frame	31.5”W Frame	RMU’s
FR-DC78X24X42x	FR-DC78X28X42x	FR-DC78X31.5X42x	42U
FR-DC78X24X48x	FR-DC78X28X48x	FR-DC78X31.5X48x	42U
FR-DC84X24X42x	FR-DC84X28X42x	FR-DC84X31.5X42x	45U
FR-DC84X24X48x	FR-DC84X28X48x	FR-DC84X31.5X48x	45U
FR-DC90X24X42x	FR-DC90X28X42x	FR-DC90X31.5X42x	48U
FR-DC90X24X48x	FR-DC90X28X48x	FR-DC90X31.5X48x	48U
FR-DC96X24X42x	FR-DC96X28X42x	FR-DC96X31.5X42x	52U
FR-DC96X24X48x	FR-DC96X28X48x	FR-DC96X31.5X48x	52U

“x” = Color Code e.g. FR-DC78X24X42BK




**Doors:**

- Carbon steel all welded construction for strength
- Curved perforated front doors (79% open)
- Flush mount perforated rear door is field reversible without tools
- Split perforated rear doors also available
- Doors include standard EMKA lock
- Optional Electronic Locks, Proximity Locks and Combo Locks available
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

78" H Frame	84"H Frame	90"H Frame	96"H Frame	Width
<b>Curved:</b>				
DPRF-DC76X22x	DPRF-DC82X22x	DPRF-DC88X22x	DPRF-DC94X22x	24"
DPRF-DC76X26x	DPRF-DC82X26x	DPRF-DC88X26x	DPRF-DC94X26x	28"
DPRF-DC76X30x	DPRF-DC82X30x	DPRF-DC88X30x	DPRF-DC94X30x	31.5"
<b>Flush Mount:</b>				
DPRF-DC74X21x	DPRF-DC80X21x	DPRF-DC86X21x	DPRF-DC92X21x	24"
DPRF-DC74X25x	DPRF-DC80X25x	DPRF-DC86X25x	DPRF-DC92X25x	28"
DPRF-DC74X28x	DPRF-DC80X28x	DPRF-DC86X28x	DPRF-DC92X28x	31.5"
<b>Flush Mt. Split:</b>				
DPRF-DC74X21-2x	DPRF-DC80X21-2x	DPRF-DC86X21-2x	DPRF-DC92X21-2x	24"
DPRF-DC74X25-2x	DPRF-DC80X25-2x	DPRF-DC86X25-2x	DPRF-DC92X25-2x	28"
DPRF-DC74X28-2x	DPRF-DC80X28-2x	DPRF-DC86X28-2x	DPRF-DC92X28-2x	31.5"

*"x" = Color code: e.g. DPRF-DC76X22BK*

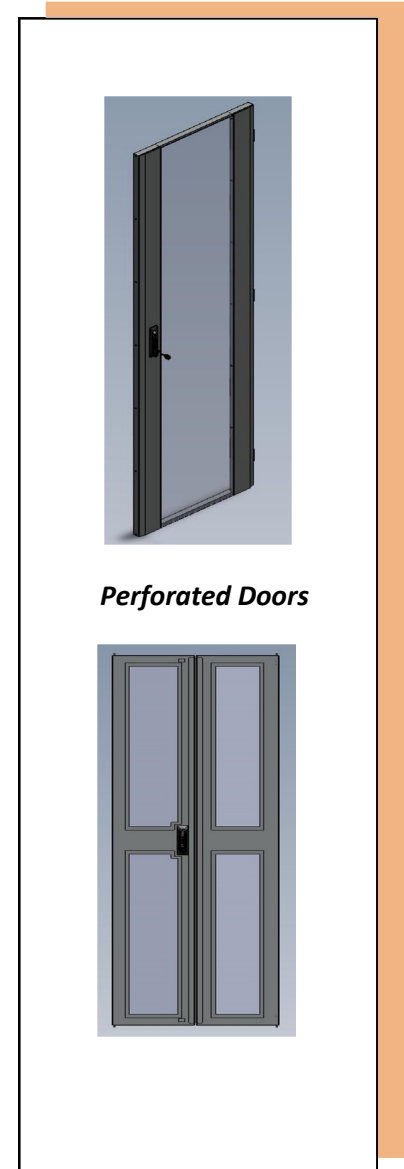

**Lock Options:**






**DC SERIES SIDE PANELS, FRAME COUPLER**

**Side Panels:**

- Flush mount split side (top/bottom) solid side panels equipped with key Lock for optimal security
- Constructed from carbon steel
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request


78”H Frame	84”H Frame	90”H Frame	96”H Frame	Depth
<b>Split (top/bottom)</b>				
SP-DC72X31x	SP-DC78X31	SP-DC84X31x	SP-DC90X31x	42”
SP-DC72X37x	SP-DC78X37	SP-DC84X37x	SP-DC90X37x	48”
<i>“x” = Color code: e.g. SC-DC72X31BK</i>				

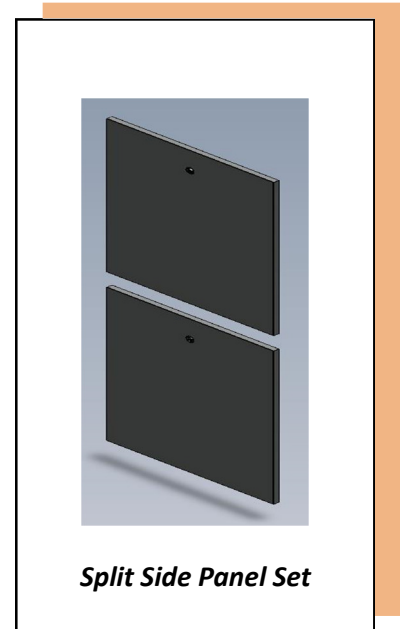

**DC SERIES TOPS**

- Flush mount tops available in 2 styles for 24”, 28” and 31.5” wide frames:
  - Perforated top with cable access holes
  - Solid top with brushed cable entry holes
- Carbon steel construction
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

24” Wide	28” Wide	31.5” Wide	Frame Depth
<b>Perforated:</b>			
FMT-DC21X34PRFx	FMT-DC25X34PRFx	FMT-DC29X34PRFx	42”
FMT-DC21X40PRFx	FMT-DC25X40PRFx	FMT-DC29X40PRFx	48”
<b>Solid:</b>			
FMT-DC21X34x	FMT-DC25X34x	FMT-DC29X34x	42”
FMT-DC21X40x	FMT-DC25X40x	FMT-DC29X40x	48”
<i>“x” = Color code: e.g. FMT-DC21X34BK</i>			

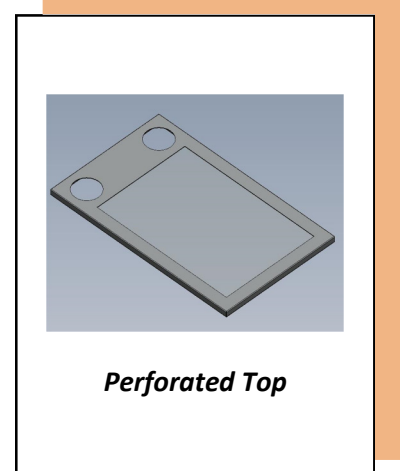



**DC SERIES CABINET ACCESSORIES cont'd**

**Vertical Cable Managers:**

- Cavity mount Vertical Cable Managers
- 1.62"W w/cover
- Provides a convenient cable run vertically
- Can be mounted on either side in PDU cavity
- Optional plastic Cable Manager Fingers available (SWE2370 – pkg. of 6)
- All steel construction
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request


**Frame Height:**

78"	84"	90"	96"
DC-VCM42Ux	DC-VCM45Ux	DC-VCM48Ux	DC-VCM51Ux
<i>"x" = Color code: e.g. DC-VCM42UBK</i>			

**PDU Vertical Mounting Bracket**

- Available in 4 heights x 7"W
- Full height bracket attaches to cabinet frame to provide options for mounting Vertical power distribution units
- Installed in rear PDU cavity – includes outside cover
- Provides tie points for power cords
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

Part #	Description	Height
DC-PDU42Ux	Full height w/outside cover, 7"W	78"
DC-PDU45Ux	Full height w/outside cover, 7"W	84"
DC-PDU48Ux	Full height w/outside cover, 7"W	90"
DC-PDU52Ux	Full height w/outside cover, 7"W	96"
<i>"x" = Color code: e.g. DC-PDU42UBK</i>		

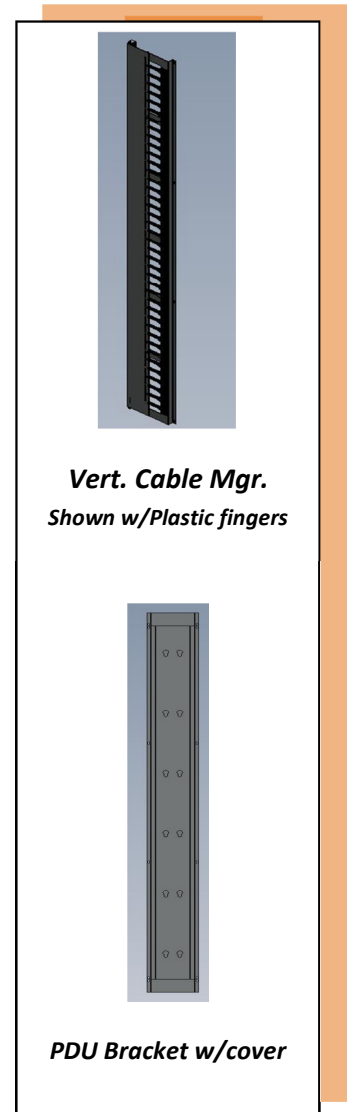

**Vert. Cable Mgr.**  
Shown w/Plastic fingers

**PDU Bracket w/cover**