




DC Series Cabinets

- Available in four widths, four heights and two depths
- All welded steel tubing construction provides a 4000-lb. static load rating and 3500-lb. rolling/shipping rating for high-density integration
- Seismic Zone 4 rated, UL listed
- PCI Compliant cabinet
- 19" wide rack mount
- 7" wide PDU cavity in rear off-sets PDU's further outside the rail space
- Mounting rails (2 pr. included) are cage nut style, punched on EIA 5/8-5/8-1/2" standard spacing and are fully adjustable front to rear All are provided with M6 Cage Nuts and screws (bag of 50 each)
- Optional flush mounted split (top & bottom) side panels supplied with key lock for optimal security
- Optional doors include flush mount perforated doors, split flush mounted perforated doors, and curved surface mount Perforated doors. All doors include standard swing-handle locks and have high-airflow honeycomb perforations. Optional combination locks available
- Optional flush mount top choices include Perforated with cable access, or solid with brushed cable openings
- Open base for raised floor ventilation option
- HD formed bottom structure includes both seismic tie down and caster mount features
- Four point leveling
- Includes top mount frame coupler
- Optional deployable duty casters available and are rated for 4,000 lbs.
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

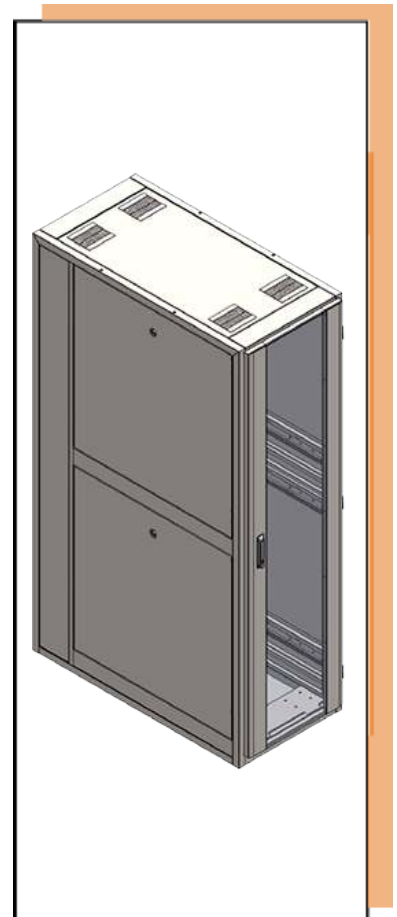

Pre-Configured Part Number Matrix for DC Series Cabinets

DC	-	48	24	48	1	P	1	-	1
Product	Height in RU	Frame Width (inches)	Frame Depth (Inches)	Sides	Top	Doors	Color		
	42	24	42	0 = No Sides	N = No Top	0 = No Doors	1 = Black		
	45	28	48	1 = One Side	P = Perf Top w/Cable Entrance	1 = Front Flush Perf/Rear Flush Split Perf	2 = White		
	48	30		2 = Two Sides	S = Solid Top w/Brushed Cable Entrance	2 = Curved Front Perf/Rear Flush Split Perf			
	52	31.5				3 = Curved Front perf/Rear Curved Perf			
						4 = Front Flush Perf/Rear Flush Perf			




DCSERIES FRAMES AND MOUNTING RAILS

Frames:

- Available in 4 heights, 3 widths and 3 depths
- All welded steel tubing construction provides a 4000-lb. static load rating and 3500-lb. rolling/shipping rating for high-density integration
- 7" W PDU cavity in rear
- Includes (2) pair of Cage Nut mounting rails and leveling feet
- Includes top mount frame coupler
- HD formed bottom structure includes both seismic tie down and caster mount features
- Frames are Seismic Zone 4 rated, UL Listed
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

Mounting Rails

- 12-gauge steel Cage Nut style punched on EIA standard spacing
- RU marks and silk screened numbers

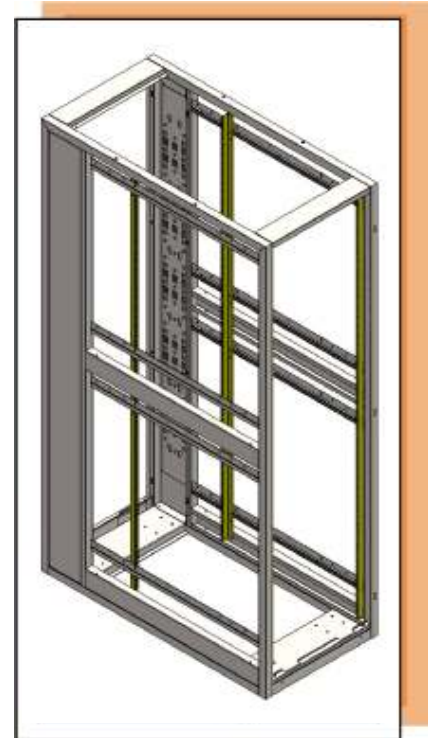




Doors:

- Carbon steel all welded construction for strength
- Curved perforated front doors (79% open)
- Flush mount perforated rear door is field reversible without tools
- Split perforated rear doors also available
- Doors include standard swing-handle lock
- Optional Electronic Locks, Proximity Locks and Combo Locks available
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

Lock Options:

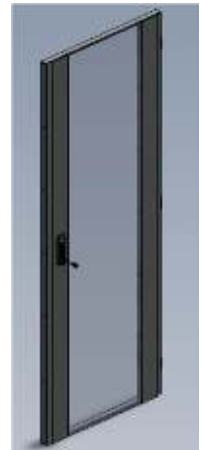

Perforated Doors






DC SERIES SIDE PANELS, FRAME COUPLER


Side Panels:

- Flush mount split side (top/bottom) solid side panels equipped with key Lock for optimal security
- Constructed from carbon steel
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

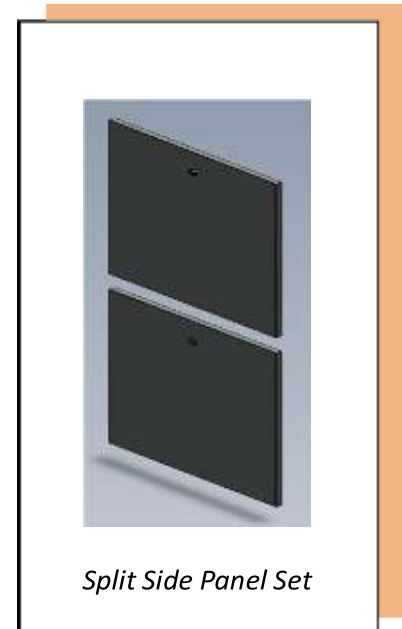

DC SERIES TOPS

- Flush mount tops available in 2 styles for 24", 28" and 31.5" wide frames:
 - Perforated top with cable access holes
 - Solid top with brushed cable entry holes
- Carbon steel construction
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

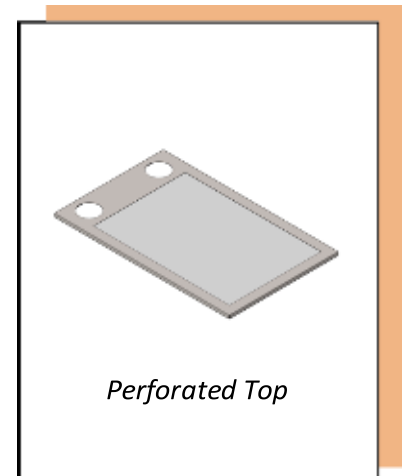



DC SERIES CABINET ACCESSORIES cont'd

Vertical Cable Managers:

- Cavity mount Vertical Cable Managers
- 1.62" W w/cover
- Provides a convenient cable run vertically
- Can be mounted on either side in PDU cavity
- Plastic Cable Manager Fingers covers are included
- All steel construction
- upon request

Frame Height:

78"	84"	90"	96"
DC-VCM42Ux	DC-VCM45Ux	DC-VCM48Ux	DC-VCM51Ux
<i>"x" = Color code: e.g. DC-VCM42UBK</i>			

PDU Vertical Mounting Bracket

- Available in 4 heights x 7" W
- Full height bracket attaches to cabinet frame to provide options for mounting Vertical power distribution units
- Installed in rear PDU cavity – includes outside cover
- Provides tie points for power cords
- Standard Black or Hammertone White Powder Coat finish – custom colors upon request

Part #	Description	Height
DC-PDU42Ux	Full height w/outside cover, 7" W	78"
DC-PDU45Ux	Full height w/outside cover, 7" W	84"
DC-PDU48Ux	Full height w/outside cover, 7" W	90"
DC-PDU52Ux	Full height w/outside cover, 7" W	96"
<i>"x" = Color code: e.g. DC-PDU42UBK</i>		

